DESIGNED AND ENGINEERED BY

AMP GROUP

Scan QR code
for setup, manuals
and support


News • Products • Where to buy

AMPGROUP.PRO

This RAGE™ product contains recyclable materials and components.
At the end of its service life, do not dispose of it with household waste.
Take it to an authorized collection or recycling point to help protect
the environment.

RAGE

Energy of Excellence

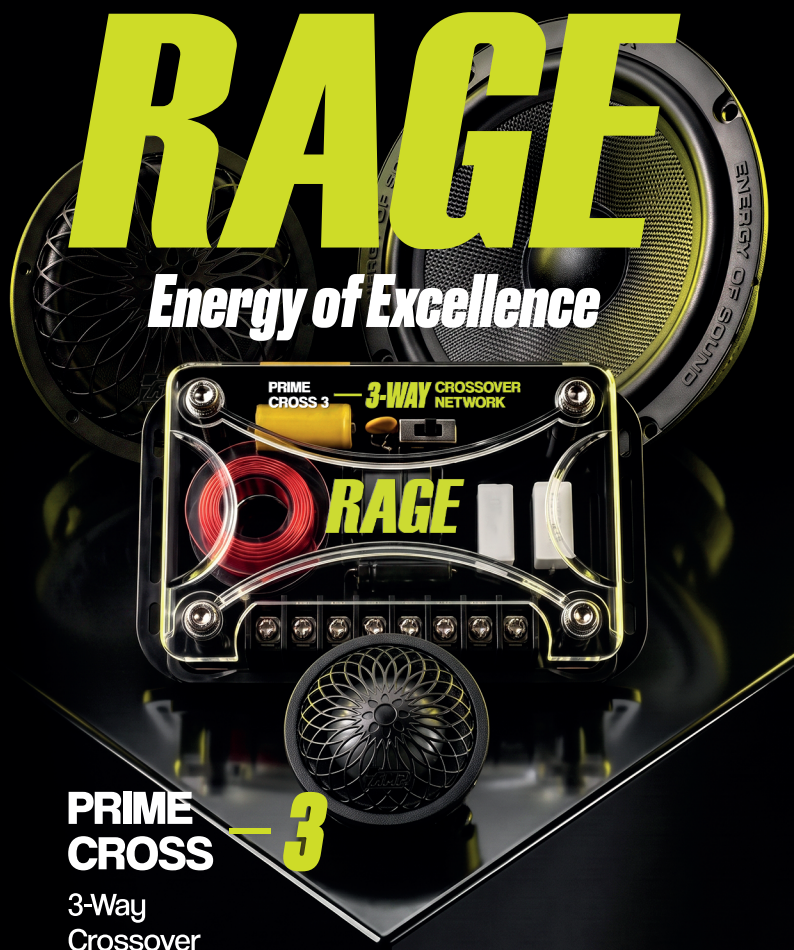

PRIME CROSS — 3

3-Way
Crossover

ENGINEERED TO EXCEED EXPECTATIONS

Thank you for choosing RAGE™.

Every RAGE™ product is created to reveal more energy, precision and emotion in your music. **Energy of Excellence** is our commitment to combine powerful performance, accurate sound and uncompromising engineering in every detail.

RAGE™ – ENERGY OF EXCELLENCE

Specifications

Woofer Crossover Slope	**12 dB/Oct**
Woofer Crossover Frequency	**700 Hz** (LPF)
Midrange Crossover Slope	**6 dB/Oct**
Midrange Crossover Frequency	**800 Hz / 5 kHz** (HPF / LPF)
Tweeter Crossover Slope	**12 dB/Oct**
Tweeter Crossover Frequency	**5 kHz** (HPF)
Dimensions (L/W/H)	**138 × 83 × 39 mm**

Wiring

⊕ IN ⊖ ⊕ WF ⊖ ⊕ MID ⊖ ⊕ TW ⊖

Connect the **amplifier output to the IN** terminals.

Connect the **woofer to WF**, the **midrange speaker to MID**, and the **tweeter to TW**.

Observe correct polarity when connecting all components: connect “+” to “+” and “–” to “–”. Incorrect polarity may reduce sound quality and disturb the stereo image.

Warranty Period	12 months
Storage Life	3 years
Service Life	5 years
Operating Temperature	+5…+30 °C
Storage and Transportation Temperature	–20…+40 °C

РУС.

СОЗДАНО, ЧТОБЫ ПРЕВОСХОДИТЬ ОЖИДАНИЯ

Благодарим вас за выбор RAGE™.

Каждый продукт RAGE™ создан, чтобы раскрыть в музыке больше энергии, точности и эмоций. **Энергия превосходства** – это стремление объединить высокую мощность, точное звучание и бескомпромиссную инженерную проработку каждой детали.

RAGE™ – ЭНЕРГИЯ ПРЕВОСХОДСТВА

Технические характеристики

Крутизна среза НЧ-фильтра	**12 дБ/окт**
Частота среза НЧ-фильтра	**700 Гц** (LPF)
Крутизна среза СЧ-фильтра	**6 дБ/окт**
Частоты среза СЧ-фильтра	**800 Гц / 5 кГц** (HPF / LPF)
Крутизна среза ВЧ-фильтра	**12 дБ/окт**
Частота среза ВЧ-фильтра	**5 кГц** (HPF)
Размеры (Д/Ш/В)	**138 × 83 × 39 мм**

Подключение

⊕ IN ⊖ ⊕ WF ⊖ ⊕ MID ⊖ ⊕ TW ⊖

Подключите выход усилителя к клеммам IN. Низкочастотный динамик подключите к WF, среднечастотный динамик – к MID, высокочастотный динамик – к TW. При подключении всех компонентов соблюдайте полярность: «+» подключайте к «+», а «–» – к «–». Нарушение полярности может ухудшить качество звучания и стереообраз.

Гарантийный срок	12 месяцев
Срок хранения	3 года
Срок службы	5 лет
Рабочая температура	+5…+30 °C
Температура хранения и транспортировки	–20…+40 °C